




J&M Model 815L Vibratory Driver / Extractor

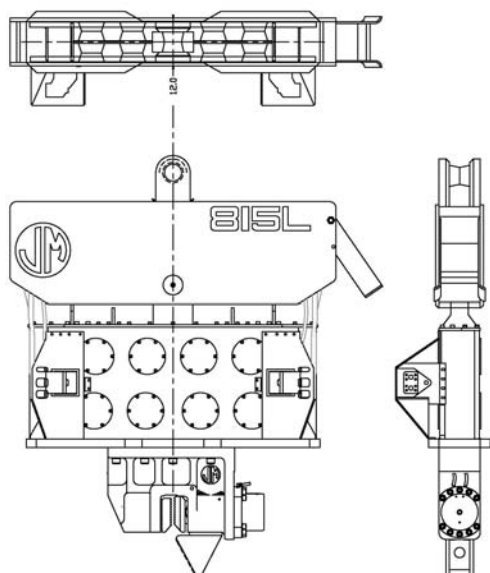

Engineered for versatility to match virtually any project requirements

- 4,400 In-lbs of precision cast Hi-Dent® eccentric moment provides the maximum amplitude to drive the heaviest piles even in highly elastic soils.
- Light weight suspension housing to minimize boom shake.
- Narrow 12" throat width allows minimum width HRS & CRS sheet piles.
- Super-tough forged gears provide an unmatched 12-year useful life.
- 40-ton elastomeric suppressor handles your toughest pulling jobs while providing the industry's highest working toad safety factor.
- Supplied with environment friendly non-toxic biodegradable hydraulic oil.
- Heavy duty hydraulic motors are actually rated for 6000 PSI service.
- Clamps include internal holding valves for safety and extra-heavy wall cylinders machined from solid blocks to eliminate cylinder guards.
- Highest quality Commercial Intertech pumps and VOAC motors in time proven reliable open-loop hydraulic system ensure maximum efficiency, maximum reliability and simpler, quicker unit serviceability.
- Optional digital radio remote provides total operator freedom of movement.
- Made In the USA by the industry's most technologically innovative manufacturer of hydraulic vibratory pile drivers / extractors since 1974.
- Quickly adaptable for underwater, low headroom or box lead operation.

VIBRATOR

Eccentric moment	4,400 in-lbs (5070 kg-m)
Frequency	1600 vpm (1600 vpm)
Centrifugal force	160 tons (1425 kN)
Amplitude (free hanging)	1.17 in (30 mm)
Max line pull for extracting (variable)	40 ton (355 kN)
Weight (no Clamps or hoses)	11,500 lbs (5215 kg)
Height (without clamp)	85 in (2159 mm)
Length	95 in (2413 mm)
Width	27.69 in (703 mm)
Throat width	12 in (305 mm)
Hydraulic hose length	150 ft (45 m)
Hydraulic hose weight	1,700 lbs (770 kg)

POWER UNIT

Engine	CAT Tier III C-15
Power	575 HP (429 kW)
Operating speed	2100 rpm (2100 rpm)
Drive pressure	5,000 psi (345 bar)
Drive flow	155 gpm (590 lpm)
Clamp pressure	4,800 psi (330 bar)
Clamp flow	6.5 gpm (25 lpm)
Weight (w/ full fluid & fuel)	15,400 lbs (6985 kg)
Length	154 in (3910 mm)
Width	60 in (1525 mm)
Height	96 in (2435 mm)
Hydraulic reservoir	385 gal (1460 l)
Fuel capacity	150 gal (570 l)

HYDRAUUC CLAMPS:	Standard	Single Sheet	Casing	Concrete & Small Pipe
	Universal Clamp	Z-Pile Clamp	Clamps w/ 7' Beam	Timber Clamp
Clamping force	125 tons (1112 kN)	125 tons (1112 kN)	160 tons (1423 kN)	53 ton (470 kN)
Weight	2,150 lbs (975 kg)	3,190 lbs (1447 kg)	3,260 lbs (1479 kg)	4,970 lb (2255 kg)
Length	45 3/4 in (1160 mm)	48 1/2 in (1230 mm)	110 in (2795 mm)	43 in (1095 mm)
Width	12 in (305 mm)	18 in (460 mm)	13 3/4 (350 mm)	27 in (685 mm)
Height	37 3/4 in (960 mm)	41 1/4 in (1050 mm)	26 in (660 mm)	79 in (2005 m)

Corporate Office
7032 S. 196th Street
Kent, WA 98032
Phone: 800-248-8498
 253-872-0141
 Fax: 253-872-8710